



Wheel Loader Boom Mowers



RO
TARY
AND
FLAIL

DURABILITY INNOVATION
COMMITMENT

Features



The Tiger Bengal series can be attached to a Wheel Loader Quick attach system. The Boom Unit features a totally independent power plant capable of delivering 85 HP of cutting performance. Designed with electronic joystick control system, the operator can achieve maximum performance in all types of vegetation. The Tiger Bengal has been designed for rotary or flail type cutter heads. Contact Tiger for more information on attaching a Tiger Boom Mower to your Wheel Loader.

CUTTER HEADS

Rotary	50" or 60"
Flail	50" or 63"

AUXILIARY ENGINE SPECIFICATION


Engine Model	4B3.3TAA (Tier 3/Stage IIIA)
Engine Type	4 cyl., Turbo Diesel
Power Rating	85 HP/63Kw @ 2600 RPM
Boom Controls	Electronic Joystick



BOOM SPECIFICATION

BENGAL	21	24	26
A- Reach Out	21.1	23.9	26.2
B- Reach Out @Max. Down	7.6	11.7	12.9
C- Reach Down	11.1	13.0	15.0
D- Reach Up	17.0	21.2	23.0
E- Reach Out @Max. Up	10.8	10.7	12.1
F- Reach In	6.0	6.8	6.8
G- Ground Level	2.0	2.0	2.0

(All dimensions in feet w/ 50" rotary head)

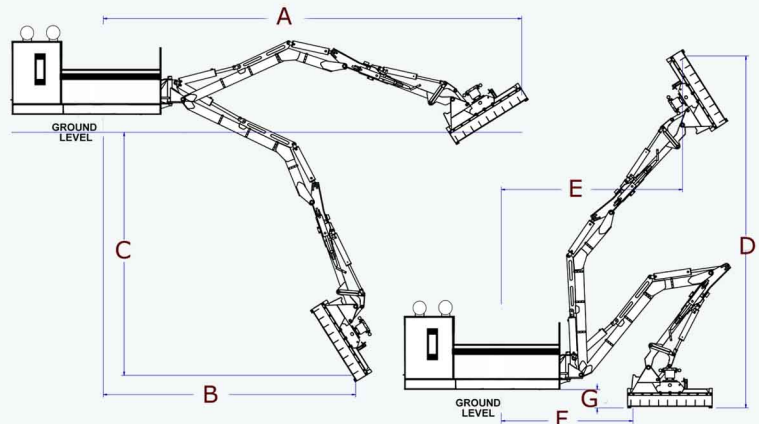

Dealer Info:



An Alamo Group Company
© 2011 Tiger Corporation, All Rights Reserved, Printed in the USA

Tiger Corporation
3301 North Louise Ave
Sioux Falls, South Dakota 57107
800-843-6849
www.tigemowers.com